

1. Getting Started

Kit Contents


- 3.5" TURBO LEOPARD Enclosure
- USB3.0 Cable
- Power Adapter
- Installation CD
- Stand
- QIG

Minimum System Requirements

- Available USB3.0 Host port
- Windows XP / VISTA / 7

Product Overview

1. Power switch
2. DC connector
3. USB3.0 port
4. OTB Button
5. HDD ejection stick
6. Power LED
7. Access LED
8. "Open" switch
9. Heat-Dissipation vents

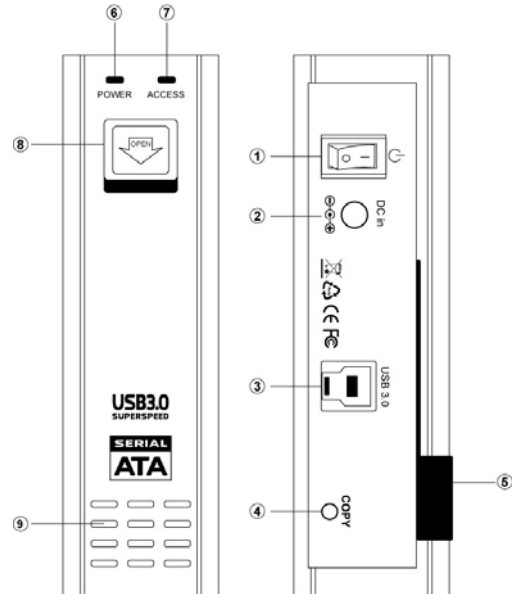

2. Assembling the 3.5" SATA HDD

Insert the hard drive :

- Step 1. Pull down the "Open" Switch, and open the front panel.
- Step 2. Insert the SATA HDD with correct position. (connector to connector)
- Step 3. Close the front panel.



Eject the hard drive

- Step 1. Open the enclosure by pulling down the "Open" switch
- Step 2. Push out the hard drive by the ejection stick.
- Step 3. Take out the hard drive.
- Step 4. Close the front panel.



3. Connecting the Drive

1. Connect one end (USB3.0 A Type) of the USB3.0 Cable to your computer.
2. Connect the other end (USB3.0 B Type) of the USB3.0 Cable to the USB port on the back of the enclosure.
3. Connect the power adapter to the power socket of the enclosure and switch the power on.
4. The power indication LED (on the front panel) will illuminate and the presence of an external drive will be visible on your PC monitor or laptop.

4. Installing Backup Software

Note : Backup Software only supports Windows 32bit system.

1. Put Installation CD-ROM into the Optical Drive on your computer or laptop.
2. Select the correct Backup software version and then follow the installation procedures.
3. Once Backup software is successfully installed on the computer or laptop, an operation icon will appear on the system tray of your computer.

5. Disconnecting the Drive

Caution : To prevent data loss, always be sure to close all active applications before shutting down the drive.

Windows

1. Double-click the Safely Remove Hardware icon in your system tray (typically located on the bottom right corner of your desktop).
2. Select the appropriate device from the list and click "Stop". Click "OK" to confirm your selection of the drive to be disconnected.
3. Click "Close" and ensure that the drive is powered off already.

6. Remarks

1. The detailed installation manual can be found in the "User Manual" of the CD.
2. The product is compliant with CE/FCC/UL/RoHS/WEEE.